


Thread Forming Screw For Thermoplastics

FIX-PLAST FAST SCREW

Thread Forming Screw for Plastic High Load Capacity

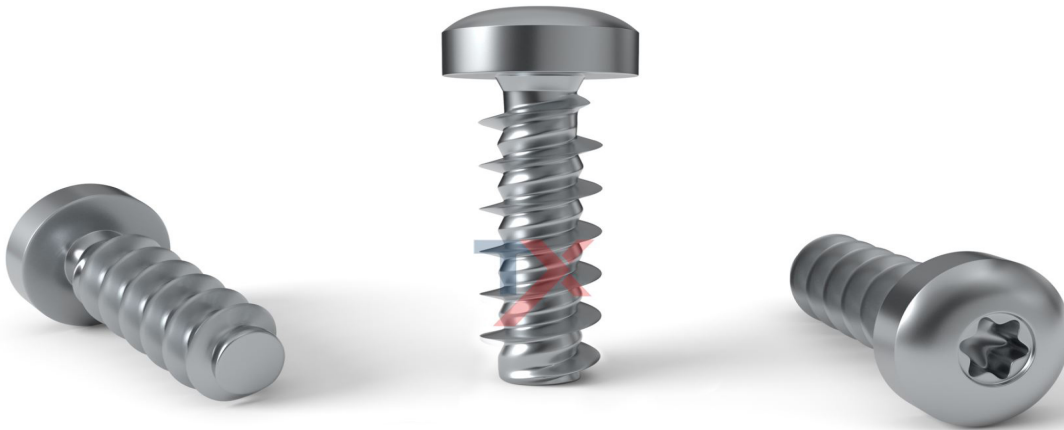

The **FIX - PLAS FAST** screw forms its thread without tension and tolerance when screwed into ready-made holes.

FEATURES AND BENEFITS

The **FIX - PLAS FAST** screw forms its thread without tension and tolerance when screwed into ready-made holes.

Several advantages in usage are provided by the shape of the thread, which includes a pin:

- Easy and fast settling of the screw
- Low screw-in torque
- High over-turning torque
- High loosening torque
- High tear-out strength
- No material damage
- Greater load-bearing capacity
- Supports the natural material characteristics

Notice

The screwdriver speed should be 400–800 rpm. We recommend that speed-dependent test screw connections are performed in initial samples. The ideal diameter for other materials must be determined.

Diameter : 2mm-12mm

Length : 4mm-200mm

